

SW24FP


24 CHANNEL MANAGED POE SWITCH



KEY FEATURES

- 2 SFP Port * 1000Mbps
- 2 Port * 1000Mbps
- 24 POE port * 100Mbps
- Transmission distance : Up to 150m (24 ports)
- Transmission speed 10 / 100Mbps / 1000Mbps
- Managed Switch

TECHNICAL DIAGRAM

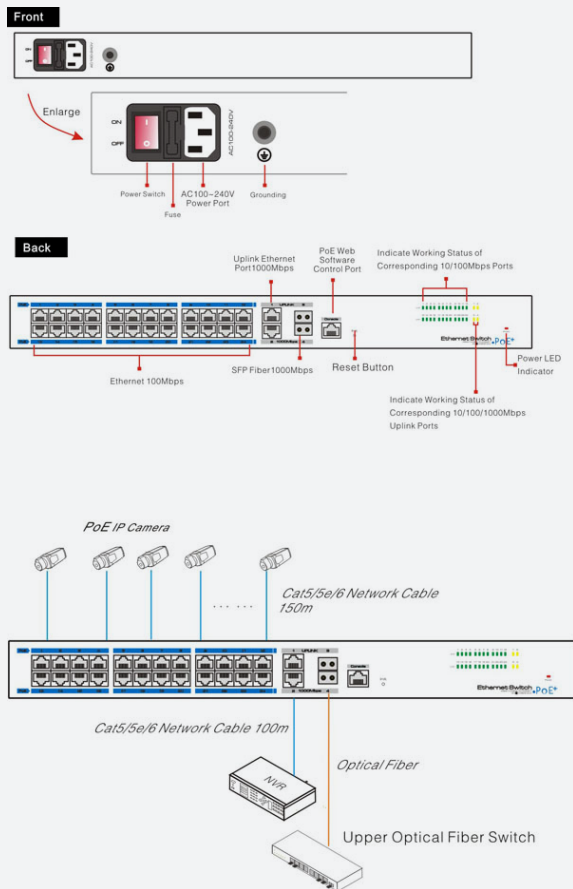

TECHNICAL SPECIFICATIONS

NETWORK CONNECTOR

| | |
|-----------------------|---|
| Port | 1~24 Ethernet Port: 10/100Mbps Uplink Port: 10/100/1000Mbps SFP: 1000Mbps Optical Fiber SFP module port |
| Transmission Distance | 1~24 port:150m Up Link Port: 0 - 100m SFP: Depend on the optical module transmission performance |
| Transmission Medium | Cat5/5e/6 standard network cable |
| PoE Protocol | IEEE802.3 af, IEEE802.3 at |
| PoE Power Supply | End-span |
| PoE Power Consumption | every port < 30W, unit < 380W |

NETWORK SWITCH

| | |
|-------------------|--|
| Standard | IEEE802.3 10BASE-T, IEEE802.3u 100BASE-TX, IEEE802.3ab 1000BASE-TX; IEEE802.3z 1000-SX/LX; IEEE802.3 X |
| Switch way | Store and forward |
| Packet Data Cache | 9.6M |
| Mac Address List | 12.8G |

PROTECTION

| | |
|----------------------|---|
| Lightning Protection | Level 3 per: IEC61000-4-5 |
| ESD | 1a contact discharge 3 level 1b air discharge 3 level Per: IEC61000-4-2 |

SYSTEM

| | |
|-------------------------|------------------------------|
| Power Consumption | 430W, Max PoE output is 380W |
| Power Adapter Voltage | AC100V-240V |
| Temperature | -10°~ 55°C |
| Humidity | 0 ~ 95% |
| Dimension (l x w x h) | 442mm * 217mm * 44mm |
| Weight | 3.1kg |