

# SW24M


24 Ports Full Gigabit Modular Ethernet Switch

## KEY FEATURES


- 24+4 full Gigabit Ethernet or optical fiber ports
- Ethernet ports support 10/100/1000Mbps, downlink optical fiber ports support 100/1000Mbps SFP module
- 1-24 downlink ports support hot pluggable Ethernet or Optical fiber modules and support mixed Ethernet and Optical modules
- Support high-speed data forwarding, very suitable for large flow of video data forwarding in security surveillance
- Provide web-based layer 2 network management and PoE management
- Redundant power design



### Front panel

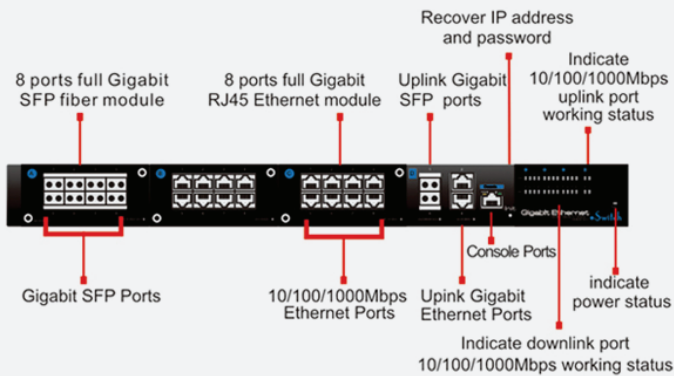

### Back panel

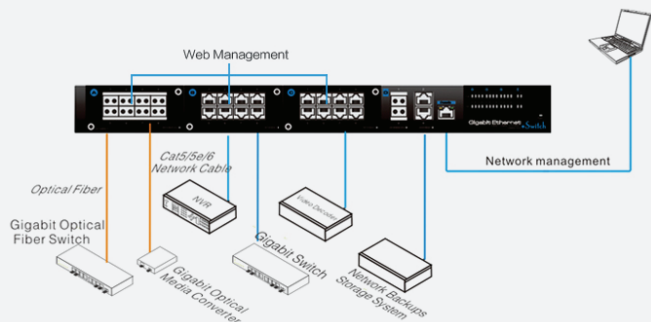

## TECHNICAL SPECIFICATIONS

### NETWORK CONNECTOR

Port	1~24 ports: 10/100/1000Mbps Ethernet ports or 100/1000Mbps SFP ports Uplink:10/100/1000Mbps adaptive Ethernet port Uplink:1000Mbps SFP module port
Transmission Distance	Ethernet ports: 100m SFP ports: depend on SFP module
Transmission Medium	SFP: Depend on the optical module Cat5/5e/6 standard network cable
PoE Protocol	-
PoE Power Supply	Mains on load
PoE Power Consumption	Each port supports Max output 30W; provide standard 120W power adapter; higher power adapter is needed for higher power demand

### NETWORK SWITCH

Network Standard	IEEE802.3,IEEE802.3u,IEEE802.3ab,IEEE802.3z,IEEE802.3X, IEEE 802.1Q,IEEE 802.1p,IEEE 802.3ad
Switch Capacity	70Gbps
Packet Data Cache	-
Mac Address List	16K

### PROTECTION

Lightning Protection	Level 3 per: IEC61000-4-5
ESD	Per:IEC61000-4-2

### SYSTEM

Power Consumption	2 x 60W
Power Adapter Voltage	AC100V-240V
Temperature	-10°~ 55°C
Humidity	0 ~ 95%
Dimension ( l x w x h )	442mm * 315mm * 44mm
Weight	3.78 kg