

# SW4FP


4 CHANNEL POE SWITCH



## KEY FEATURES

- 1 SFP Port \* 1000Mbps
- 1 Port \* 100Mbps
- 4 POE port \* 100Mbps
- Transmission distance up to 150m (CAT5E / 6)
- Operating Temperature -10°C ~ 55°C
- Redundant Power Design

## TECHNICAL DIAGRAM

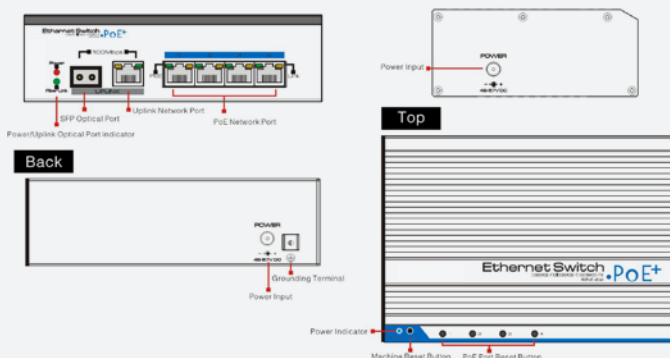

## TECHNICAL SPECIFICATIONS

### NETWORK CONNECTOR

Port

1~4 Ethernet Port: 10/100Mbps

Uplink Port: 10/100Mbps

SFP: 1000Mbps Optical Fiber SFP module port

Transmission Distance

Up Link Port: 0 - 150m

SFP: Depend on the optical module transmission performance

Transmission Medium

Cat5e/6 standard network cable

PoE Protocol

IEEE802.3af/at

PoE Power Supply

End-span

PoE Power Consumption

Every PoE port output <30W; Default with 120W power adapter, Redundant 120W power supply (optional)

### NETWORK SWITCH

Standard

IEEE802.3 10BASE-T, IEEE802.3u 100BASE-TX, IEEE802.3ab 1000BASE-TX; IEEE802.3z 1000-SX/LX; IEEE802.3 X

Switch way

Store and forward

Packet Data Cache

512K

Mac Address List

2K

### PROTECTION

Lightning Protection

4KV per: IEC61000-4-5

ESD

1a contact discharge 3 level

1b air discharge 3 level

Per:IEC61000-4-2

### SYSTEM

Power Consumption

<5W (without PoE)

Power Adapter Voltage

DC 48V~57V

Temperature

-10°~ 55°C

Humidity

0 ~ 95%

Dimension ( l x w x h )

159mm \* 110mm \* 46.5mm

Weight

540g