

SW16FP




16 CHANNEL MANAGED POE SWITCH



KEY FEATURES

- 1 SFP Port * 1000Mbps
- 2 Uplink Port * 10/100/1000Mbps Ethernet Ports
- 16 Downlink POE port * 10/100Mbps
- Transmission distance : Up to 150m (16 ports)
- Downlink Ethernet ports support PoE+, Each max 30W output
- 4K MAC address, 2.75Mb cache
- Transmission speed 10 / 100Mbps / 1000Mbps
- IEEE802.3, IEEE802.3u, IEEE802.3ab, IEEE802.3 af/at standard

TECHNICAL DIAGRAM

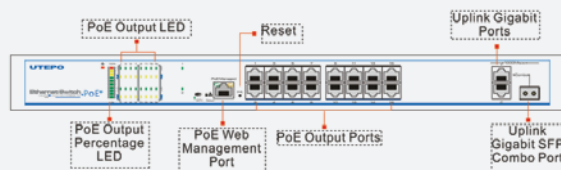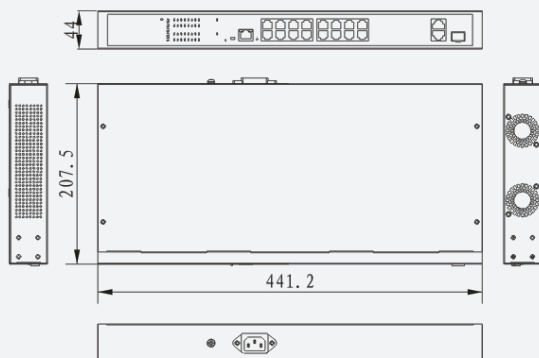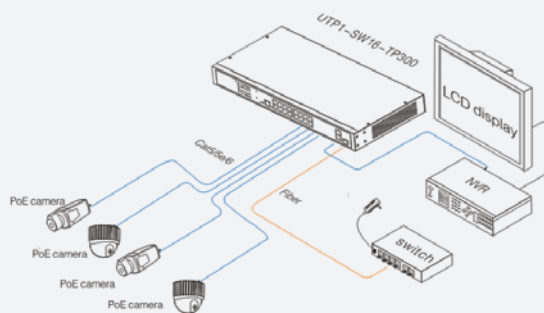

TECHNICAL SPECIFICATIONS

Downstream Ports	16*10/100Base-TX(PoE)
Uplink Ports	2*10/100/1000Base-Tand 1*1000Base-X/SFP(Combo)
Network Standard	IEEE802.3、IEEE802.3u、IEEE802.3ab、IEEE802.3z、IEEE802.3X
Switch Capacity	7.2Gbps
Throughput	5.36Mpps
Switch Processing Scheme	Store and Forward
Memory Buffer	2.75M
MAC Table	4K
PoE Standard	802.3af/at(PSE)
PsE Type	End-span
Power Pin Assignment	1/2(+), 3/6(-)
PoE Power Output	54V DC,30 watts max
PoE Budge	270 watts max
PoE Management	Via Web(Default IP Address 192.168.1.200) to check, on/off and adjust each port PoEoutput
Lightning Protection	6KV Execute : IEC61000-4-5 6KV Contact discharge 8KV Air discharge Execute : IEC61000-4-2
ESD	100~240V AC ; 50/60Hz
Power Supply	<300W(Including PoE)
Power Dissipation	-10°C~50°C
Work Temperature	-40°C~85°C
Humidity	5%-95%
Dimension (L x W x H)	442mm×207mm×44.5mm
Weight	2.69kg
Regulator	CE、FCC、ROHS