

POE-I

60W POE ETHERNET INJECTOR



KEY FEATURES

- PoE++ power supply standard; Output power consumption up to 60W
- Ultra PoE, IEEE 802.3af/at, IEEE 802.3 10Base-T/100Base-TX/IEEE802.3ab 1000Base-T
- Higher conversion efficiency(90%); Lower heat radiation
- Working Temperature: -10°C~55°C
- 6KV lightning protection; 8KV ESD
- No fan, no noise, dustproof
- LEDs indicate operation status


TECHNICAL SPECIFICATIONS

Input Voltage	AC100V~AC240V
Data Input	1×RJ45
Data Output	1×RJ45
Power Type	End-span/Mid-span
PoE Output	DC 54V/60 watts
Output Ripple	< 5%
Power Pin Assignment	Pair1:1/2(+),3/6(-) Pair2:4/5(-),7/8(+)
Communication Port	1×RJ45 Input
Transmission Rate	10/100/1000Mbps
Transmission Medium	Cat5/5e/6 Cable
Distance	100m (Max.)
Power LED	1 (Red)
PoE LED	1 (Orange)
Surge Protection	PoE Power : 1KV(Differential Mode),2KV(Common Mode)1.2/50us, 8/20us Ethernet : 2KV(Differential Mode),6KV(Common Mode)10/7000us
ESD	1a Contact Discharge Level 3 1b Air Discharge Level 3 Per: IEC61000-4-2
Working Temperature	-10°C~55°C
Storage Temperature	-40°C~85°C
Humidity(Non-Condensing)	0~95%
Dimension(L x W x H)	160mm×64mm×60mm
Material	ABS Plastics
Color	Black
Weight	200g


Front



Back



Bayonet

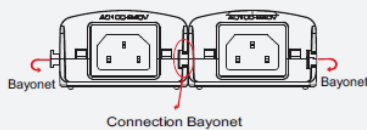

Application

